

WARRANTY

Guarantee

Arcisan shower panels are covered by a 7 year conditional residential warranty subject to the terms below.

> 7 year product or parts warranty against manufacturing defects. (Hoses and hand sprays on kitchen mixers are 2 years).

> 1 year replacement product or parts and labour warranty.

Streamline reserves the right to assess, fix, replace or service warranty claims as they see fit. The warranty period applies from date of purchase or date of handover for new buildings. If this is not available, the manufacturing date stamp on the product will be used.

Warranty claims should first be directed through the point of purchase. It is mandatory that the purchaser provide proof of purchase and the warranty is valid for the original purchaser only and is not transferable.

Exclusions

The warranty does not apply to the following cases:

- Blocked or damaged aerators are not covered under the warranty. Other damage caused by not flushing the system before connection or use.
- Damage caused by improper installation, abuse, accident and misuse. Also previous repair or alteration without the company's or agent's permission.
- Warranty only applies to items purchased through an authorised re-seller within Australia.
- Tapware used in a commercial setting. This is subject to a 1 year parts and labour warranty.
- General wear and tear from normal use of the product, including scratching from cleaning.
- Water temperature or pressure exceeds the stated maximums. The maximum water pressure is 500kpa and maximum temperature is 75 degrees Celsius.

Consequential Damages

Streamline Products will not liable for damage to other items (floor coverings, walls, lights and other fittings) or any other type of consequential losses caused by a defect in the product, except when the failure amounts to a major failure under your statutory rights.

Statutory Rights

Our goods come with guarantees that cannot be excluded in the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Contact

This warranty is provided by Streamline Products P/L

Phone: 1300 735 352

Email: customerservice@streamlineproducts.com.au

ARCISAN

ARCISAN

SYNERGII SHOWER PANEL - RETROFITTABLE - RIGHT HAND OPERATION SY02930

INSTALLATION AND CARE INSTRUCTIONS

Important Information

- Hot and cold water inlet pressures should be equal.
- Operating static pressure is 300—500kpa. If pressure exceeds this, then an approved pressure limiting valve must be fitted.
- Pipework must be flushed out prior to installation of the shower panel. Damage caused to the shower panel by debris coming through the pipework is not covered under warranty.
- Installation should comply to AS/NZS3500.1 2003 or the relevant local requirements.
- Maximum hot water temperature is 75°C.
- Not suitable for gravity feed applications.

Maintenance and care

- Using a soft cloth with a mild detergent or soap is all that is required to clean surfaces.
- Do not use abrasive cream cleaners or citrus based cleaning products. These will damage the surface.
- The spray channel of overhead shower is protected by a self-cleaning system. If scale deposits are noticed in the spray channel, turn water on lightly and rub the spray channels with a finger or sponge.

INSTALLATION

IMPORTANT INFORMATION

We recommend that mounting brackets are secured into stud work. If unable, prior to installation make sure the wall can support a load of 12kg.

Prior to installation of shower panel please familiarise yourself with the *Height Setup* page for dimensions.

Note: There are two options for installing the retrofittable Synergii shower panel.


Option 1: External water connection | **Option 2:** Concealed water connection

Step 1

Attach mounting brackets to the finished wall. Use a level to be sure that the bracket is fixed straight.

Ensure correct hardware is used to fix bracket to wall.

For mounting position, refer to *Height Setup* page and/or *Concealed water point* diagram.

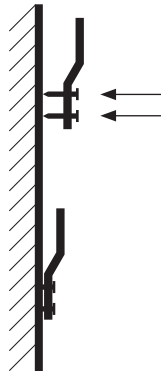


Step 2 - External water connection

Connect braided hose to the metal inlet hose on the back of the shower panel. Make sure connection is secure but do not over tighten the nut.


Connect metal inlet hose to external water connection.

Once the connections are made, turn on mains water to check for leaks.

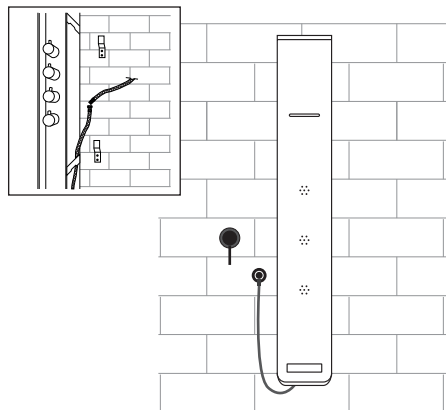


INSTALLATION

Step 2 - Concealed water connection

Attach 1/2" elbow connector to water outlet in wall. Must be orientated 90 degrees () facing down.

Screw flexible hose from back of shower panel onto wall connection. Do not over tighten the nut .

Once the connections are made, turn on mains water to check for leaks.

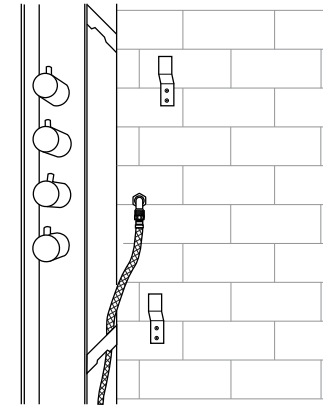

Step 3

Carefully hang the shower panel onto the mounting brackets, ensuring that both top and bottom brackets are resting in the correct location on the back of the panel.


Once the panel is in place, run a line of silicone down each side of the shower panel to fix it in place.



Step 4


Finally, connect the handshower to the bottom water outlet on the side of shower panel.

Do not overtighten the nut.

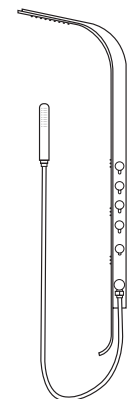

Height set-up for Synergii Shower Panel (Right Hand Operation)

SY02930

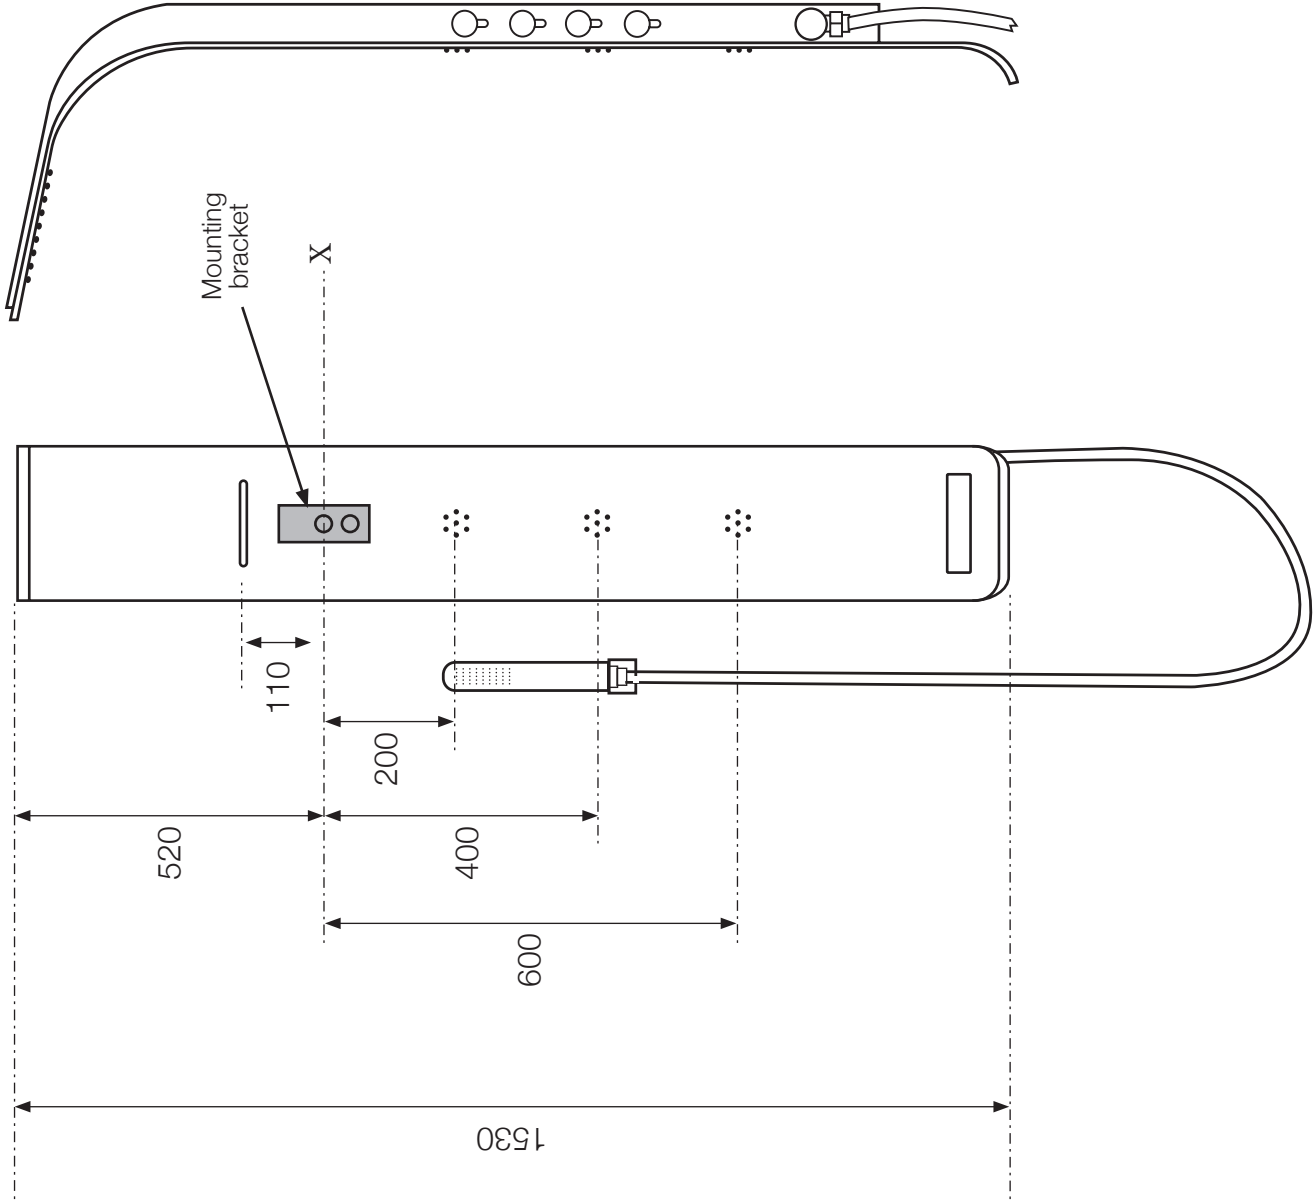

Concealed water point installation for Synergii Shower Panel Retrofittable SY02930

