

## Axis Pin Bath / Shower mixer

AX16300 - EXTERNAL PART ONLY

### Finishes available:




### INFORMATION

Pressure Rating                      Hot and cold water inlet pressures  
150 - 500kPa                              should be equal.

### CARE AND MAINTENANCE

- All surfaces should be frequent cleaned with a mixture of mild, pH neutral soap and warm water with a soft cloth
- Do not use abrasive clothes, scouring pads on surfaces
- Do not use harsh cleaning agents i.e. cream cleaners or citrus based cleaners (*see cleaning leaflet for comprehensive list*)

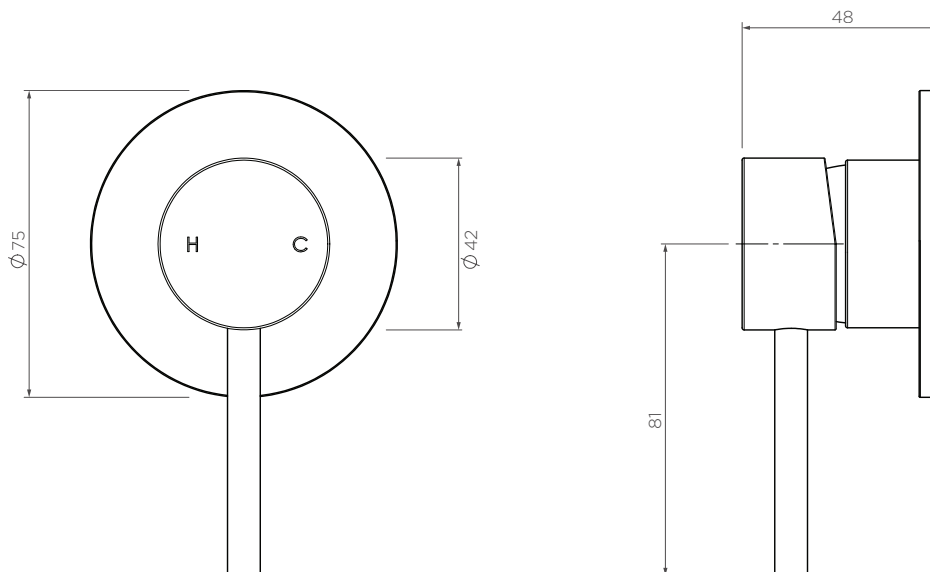

**Requires ARB0130** - Arcisan Universal in-wall body for installation.

**WARRANTY**  
15 years

\*Conditions apply.

streamline

Dimensions are in millimeters and are subject to manufacturing variations. Streamline Products reserves the right to vary specifications at any time without notice. Information provided within this specification sheet is correct at the date of printing. Please confirm all particulars with your sales consultant prior to purchase. Version: 1.1 - April 2025