

**Synergii EL wall faced pan suite | Wrap seat**

SY04178

SY04178.GR (grey wrap seat)

**Package comprised of:** Synergii EL wall faced pan and Arcisan slim line concealed cistern.

**Synergii EL wall faced pan | Wrap seat**

SY04174

SY04174.GR (grey wrap seat)

**Arcisan slim line in-wall cistern | mechanical**

AR04430

## Synergii EL wall faced pan | Wrap seat

SY04174



**WELS:** 4 stars

**Litre/min:** 3/4.5L

**WELS License / Reg No:** 1483 / L07010 (V)

**Pressure rating:** 150 - 500kPa

**Set-out:** P-trap 185mm  
S-trap 80-200mm

**Available colours:**

- White with a white wrap seat
- White with a grey wrap seat (SY04174.GR)




### INFORMATION

Hot and cold water inlet pressures should be equal.

### CARE AND MAINTENANCE

- All surfaces should be frequent cleaned with a mixture of mild, pH neutral soap and warm water with a soft cloth
- Do not use abrasive clothes, scouring pads on surfaces
- Do not use harsh cleaning agents i.e. cream cleaners or citrus based cleaners (*see cleaning leaflet for comprehensive list*)

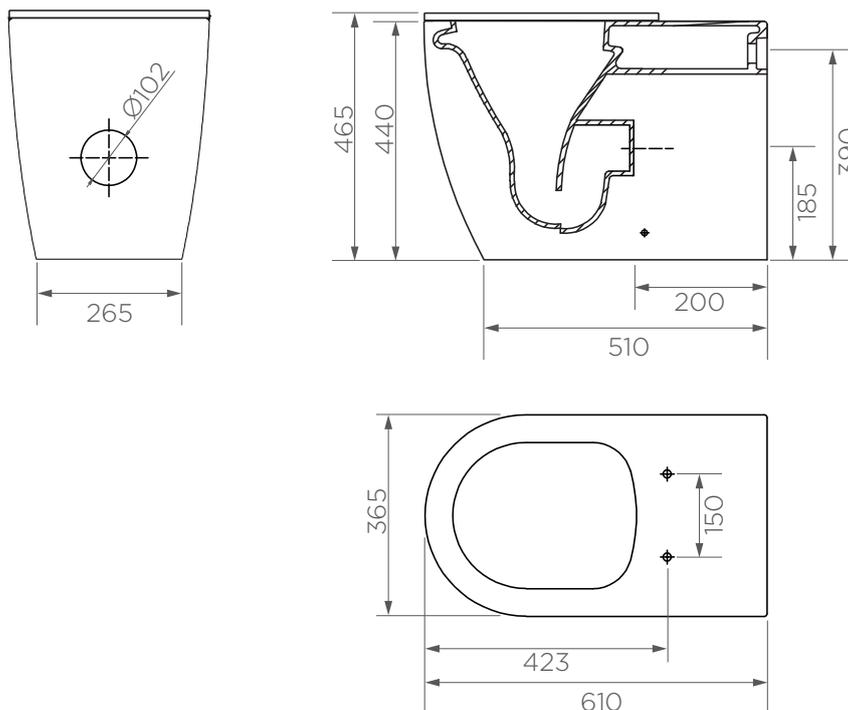

**Requires AR04430:** Arcisan in-wall cistern for installation.



\*Conditions apply.

## Arcisan slim line in-wall cistern | mechanical

ARO4430

**WELS:** 4 stars

**Litres/min:** 3/4.5L

**Pressure rating:** 150 - 500kPa

**Inlet Position:** Top left


**Material:** High density polyethylene

### INFORMATION

The slim concealed, dual flush cistern is made from high density polyethylene, incorporating inbuilt overflow. Due to its slim design, the cistern can be installed in a standard 90mm metal or timber stud wall application.

Hot and cold water inlet pressures should be equal.

**What does mechanical mean?** This is standard fixing on front of cistern. The push plate mechanically pulls the levers up to open the outlet mechanism and flush the toilet.

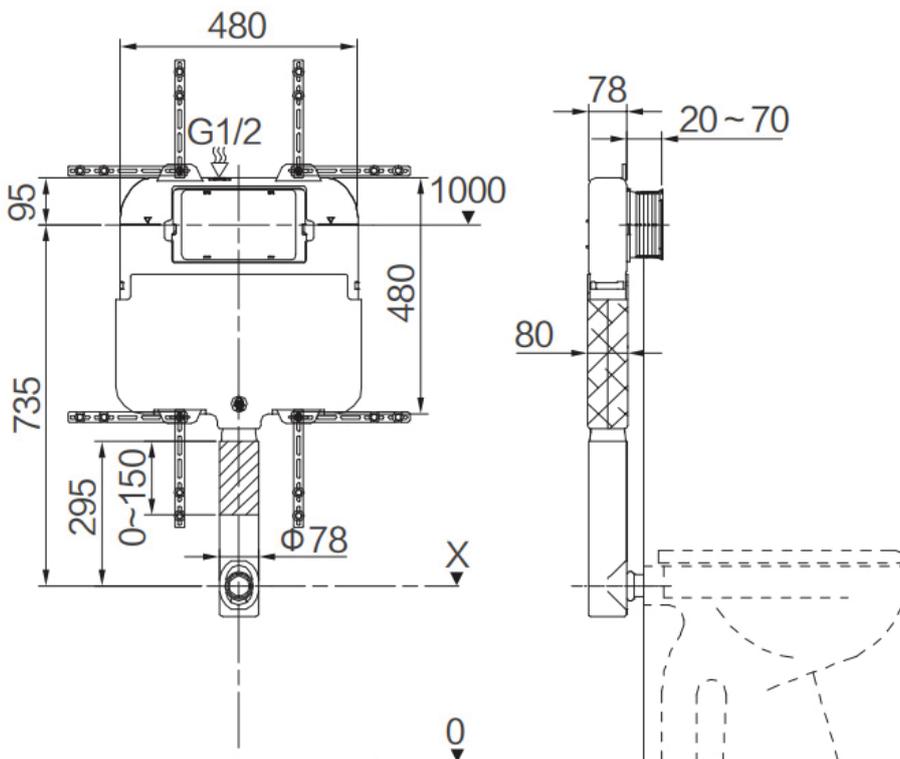

**WARRANTY**  
10 years

\*Conditions apply.

streamline

www.streamlineproducts.com.au | Ph: 1300 735 352

Dimensions are in millimeters and are subject to manufacturing variations. Streamline Products reserves the right to vary specifications at any time without notice. Information provided within this specification sheet is correct at the date of printing. Please confirm all particulars with your sales consultant prior to purchase. Version: 1.1 - Sept 2024